




Model 8702

Programmable Electronic Load

IT8702 IT8700 Series mainframe

There are GPIB/Ethernet/USB/RS232 communication interfaces on IT8702 mainframe. You can use SCPI standard communication protocol to remote control all the modules at the same time.

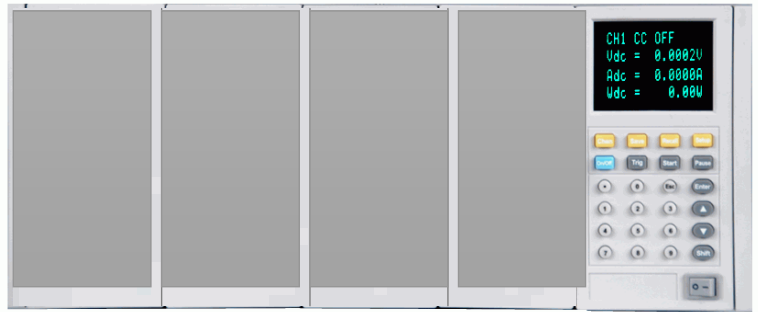

Feature:


- Ethernet communication interface
- USB communication interface
- RS232 communication interface
- GPIB-IEEE488 communication interface
- Support SCPI communication protocol
- Support several electronic loads working at the same time
- Output terminals on the rear panel make wiring easy and keep front panel clean
- Highlight VFD display for both mainframe and modules
- Can be extended to 8 slots.
- Auto-test function

Specification:

Display screen	VFD
Memory capacity	100 sets
The number of slots	4(can be extend to 8)
The number of channels	8 channels
AC power input	110V/220V
Dimension (W*H*D)	445*192*561
Weight	10 Kg

Standard accessory:

- AC power cord
- User manual

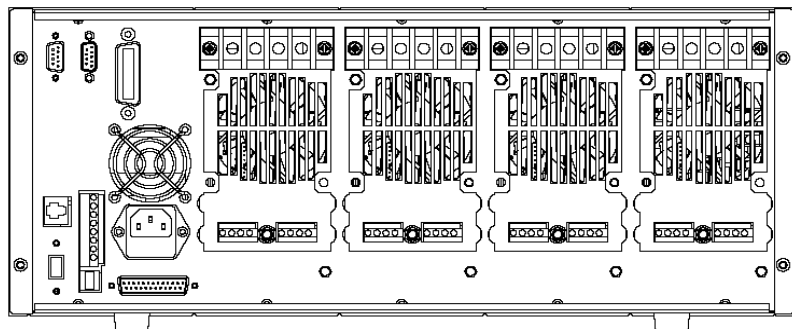

ITECH Electronic Co., Ltd

Tel: 025-52415358, 52415099 www.itechate.com

Fax: 025-52415268, 52405299